

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 052 770 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

15.11.2000 Bulletin 2000/46

(51) Int. Cl.⁷: H03C 5/00

(21) Application number: 00303827.0

(22) Date of filing: 08.05.2000

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 10.05.1999 GB 9910822

(71) Applicant:

Securicor Wireless Technology Limited
Sutton, Surrey SM1 4LD (GB)

(72) Inventors:

- Wilson, Nigel
Bradford on Avon, Wiltshire BA15 1SE (GB)
- Hillum, Rick A.
Trowbridge, Wiltshire BA14 0UJ (GB)


(74) Representative:

Ayers, Martyn Lewis Stanley
J.A. KEMP & CO.
14 South Square
Gray's Inn
London WC1R 5LX (GB)

(54) Modulator using AM and PM

(57) A radio frequency amplifier uses an offset phase locked loop to produce a radio frequency signal from a baseband signal. In order to allow the phase locked loop to process the signal as one of constant amplitude, the signal is amplitude limited prior to appli-

cation to the phase comparator, and envelope restoration is achieved by envelope-modulating the output in the RF power amplifier stage.

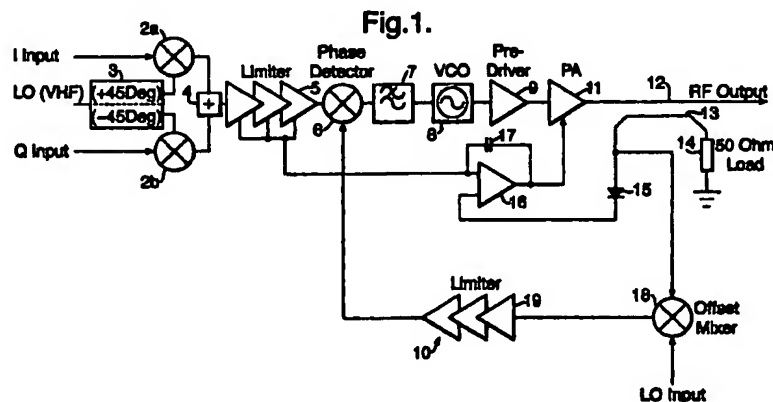

BEST AVAILABLE COPY

EP 1 052 770 A1

Description

[0001] The present invention relates to apparatus for producing a radio frequency signal with non-constant envelope modulation.

[0002] So-called "Cartesian" amplifiers have been used in radio equipment for use, for example, in mobile radio systems. In a Cartesian amplifier, a base band signal resolved into I and Q quadrature components which are processed separately for modulation purposes and recombined just prior to application to the radio frequency amplifier. These amplifiers are subject to two limitations, namely they are capable of handling only a relatively narrow bandwidth at baseband (e.g. up to 25 KHz), and there is a noise floor which it is not possible to remove due to the action of the feedback loop and the use of a vector modulator.

[0003] The present invention seeks to provide an apparatus which can produce a non-constant-envelope radio frequency output signal with a transmission bandwidth greater than a Cartesian amplifier, e.g. of the order of a few hundred kilohertz, and which is capable of low noise performance.

[0004] According to the present invention there is provided an apparatus for producing a non-constant-envelope radio frequency signal comprising:

- a) an input for a baseband signal;
 - b) means for generating from the baseband signal a modulated radio frequency signal of substantially constant envelope amplitude and suitable for radio-frequency amplification to a level for broadcasting;
 - c) means for envelope-modulating and outputting the amplified radio-frequency modulated signal so as to have a required non-constant envelope;
- wherein the generating means b) comprises i) a frequency-offset phase locked loop including a frequency-controllable oscillator which produces as its output said modulated radio frequency signal of substantially constant envelope amplitude and ii) a phase comparator, the output of the phase comparator being a signal representing the phase difference between a constant-envelope-amplitude signal derived from the output of means c) and a constant-envelope signal derived from the baseband signal.

[0005] The invention will be further described by way of non-limitative example with reference to the accompanying drawings in which:

Figure 1 is a block circuit diagram of one embodiment of the present invention;
 Figure 2a is a block circuit diagram of a first variant of the embodiment of Figure 1; and
 Figure 2b is a block circuit diagram of a second variant of the embodiment of Figure 1.

[0006] The apparatus shown in the Figure 1 is for modulating an RF signal for broadcast with a baseband signal in which is encoded digital data which it is desired to transmit, and for amplifying the RF signal to a level suitable for broadcast. However, it should be emphasised that the invention is not restricted to use with digital data signals, but can be used with voice and other audio signals as well as other types of signal entirely. The illustrated apparatus is intended for use with a baseband signal with any bandwidth up to the order of a few hundred kilohertz and to produce a modulated RF signal at a frequency, say, of 400 MHz with a non-constant envelope. The frequency of use of this invention is not restricted and could be almost any RF frequency e.g. 108-138 MHz, 390-420 MHz, 1.8 GHz, 3.5 GHz, 5 GHz, etc.

[0007] As will become apparent from the following, the circuit operates in the manner of an Offset Phase Locked Loop (OPLL) modulator. Ordinarily, OPLL modulators can not be used with non-constant-envelope modulation scheme because they provide no means to control the amplitude of the modulated signal.

[0008] For the purposes of explanation, prior to application to the circuit shown in Fig 1, the baseband digitally encoded signal is assumed to have been resolved into I and Q quadrature components by a resolver (not shown). However the invention is not restricted to that arrangement: firstly, the baseband signal can be generated *ab initio* in quadrature form (and hence not require resolving into it); and, secondly, the baseband signal need not be in quadrature form at all (though this could require other, additional, processing of the signal in order to meet regulatory and/or other requirements with regard to bandwidth, out-of-band noise and so forth). It should be noted that the invention is not restricted to using baseband signal in I/Q format; Figures 2a and 2b illustrates a variant where the I/Q format is not used.

[0009] Given a desired nominal transmission frequency FT of, say 400MHz, the apparatus requires a local oscillator to provide two related frequencies F1 and F2. By way of example, F1 is conveniently 90 MHz, which requires F2 to be either 410 MHz or 310 MHz depending on the implementation of the feedback loop of the OPLL.

[0010] The I and Q quadrature components of the baseband signal are applied to respective inputs 1a and 1b where they passed to mixers 2a and 2b which mix them with +45° and -45° phase-shifted components of the reference signal of frequency F1, which are provided by the pair of outputs of a phase splitter 3 to which this reference signal is applied. 0 and -90° could be used as an alternative to +45° and -45°, as could any other combination with the appropriate 90° phase difference.

[0011] The outputs of the mixers 2a and 2b, which contain components at the sums and differences of the baseband signal and F1 are summed by an adder 4 and

applied to the input of a multi-stage limiter 5. This limiter produces an output signal of substantially constant envelope amplitude which is applied to one input of a phase comparator 6 which constitutes part of the OPLL. Additionally, the limiter 5 produces, at output 5A a signal which represents the envelope of the signal applied to the input of the limiter.

[0012] The phase comparator 6 produces an output signal whose amplitude is proportional to the difference between the signals applied to its two inputs, one of these being the output of the limiter 5 as just described. The other input of phase comparator 6 receives a signal fed back through a feedback path generally designated 10 around the output stage of the apparatus.

[0013] The output of phase comparator 6 is applied to the input of a low pass filter 7 whose frequency characteristics are chosen such that its output is restricted to baseband frequencies. This output is applied to the frequency-control input of a controlled oscillator 8, preferably a voltage controlled oscillator which is configured for operation at a frequency centred on the nominal transmission frequency (e.g. 400 MHz) and thus produces an output, of constant envelope amplitude, of a frequency whose value depends on the OPLL phase error as represented by the output of low pass filter 7.

[0014] The RF frequency-modulated signal of oscillator 8 is passed via a driver pre-amplifier 9 to an RF power amplifier 11 which amplifies the signal to a level suitable for feeding to an aerial for broadcasting.

[0015] A directional coupler 13 loaded by a 50-ohm load 14 picks off part of the output of the RF power amplifier 11. In order to complete the "loop" of the OPLL, this signal, which is simply the broadcast RF signal scaled down in amplitude, is fed to one input of a mixer 18. The other input of mixer 18 receives a local reference signal from the aforementioned local reference oscillator at a frequency (F_2) of $F_1 + F_T$, or $F_T - F_1$, but in either event such that the output of the mixer 18 is at the frequency F_1 , the purpose being to derive a signal which can be applied to the second input of phase comparator 6, so completing the phase-control loop. This output from mixer 18 is applied to a multi-stage limiter 19 whose characteristics are matched (in terms of amplitude-limiting effect and frequency response) to the limiter 5, subject of course to any amplitude scaling required to make the signals at the two inputs of phase comparator correctly comparable.

[0016] The signal picked-off from the directional coupler 13 is also rectified by a diode 15 and applied to one input of a differential amplifier 16 which operates as an integrator and controls the gain (and hence the output envelope) of the RF power amplifier 11. The other input of differential amplifier 16 receives the envelope-representing signal described above from the output 5A of the limiter 5.

[0017] Thus the effect of the differential amplifier 16 is to reinstate or "restore" the non-constant envelope modulation which is present in the signal at the input of

limiter 5 and which is derived from the signal as it is passed to the OPLL portion of the circuit.

[0018] The key advantage of the use of the OPLL arrangement is that it allows the transmission of complex constant envelope schemes, such as GMSK, with very low noise compared to the use of a simple vector modulator, because OPLL applies modulation to a VCO as part of a control loop so the only noise generated by the modulator is the phase noise of the VCO. Modulators that do not use a OPLL typically use an I/Q vector modulator. In such a transmitter a VCO, as part of a Phase Locked Loop will contribute only part of the transmitter's noise, other components coming from the mixers in the vector modulator, thermal noise amplified from baseband if the signal to noise ratio of the input signal is insufficient and noise from a frequency up-converter that may be used after the vector modulator. Typically these contributions are significantly larger than that of the VCO. It will be appreciated that the above illustrated embodiment shares the low noise characteristics of prior OPLLs, while the envelope restoration enables this to be achieved in the context of a non-constant-envelope modulation scheme.

[0019] Advantages of the illustrated embodiment include:

- very low wide-band noise (approximately equal to that of the VCO, say - 150dBc/Hz to 160dBc/Hz)
- the transmitter operates linearly independent of modulation envelope
- it provides an easily integrated circuit implementation
- it avoids external filters to reduce wideband noise
- it avoids the linearity vs noise compromises of a Cartesian loop.

[0020] Numerous variations of the illustrated embodiment, within the scope of the appended claims, will be apparent to those skilled in the art. In particular, it is not necessary to use a closed loop arrangement for achieving the restoration of the signal envelope at the power amplification stage: rather, it could be achieved by open loop control, either on the basis of an envelope-representing control signal derived from the input signal, as in the embodiment illustrated above (Fig. 1) or a signal inputted to the apparatus and representing the required envelope modulation of the RF output (see Figs. 2a and 2b). In addition the amplitude of control of the PA can be achieved using gain control (via bias circuitry or other method) or amplitude control of supply voltages (as in conventional AM transmitters) or any other appropriate method.

[0021] In the variant shown in Figure 2a, the inputs are presented to the circuit as an amplitude information signal r and a phase information signal θ , rather than as I & Q quadrature signals. Items 2a to 5 of Figure 1 are thus omitted and instead the amplitude information signal R is applied to one input of integrator 16, while the

phase information signal θ is applied to a phase modulator 21 to the phase detector 6. The variant shown in Figure 2b is similar to that of Figure 2a, but uses open-loop, instead of closed-loop, envelope modulation. Thus items 16-18 of Figure 1 are also omitted and instead the amplitude information signal r is applied to an S-class modulator to control the envelope of the output of the power amplifier 11. S-class modulation can be achieved by variation of the power amplifier power supply voltage, e.g. by variable duty-cycle switching.

Claims

1. Apparatus for producing a non-constant-envelope radio frequency signal comprising:

- a) an input for a baseband signal;
- b) means for generating from the baseband signal a modulated radio frequency signal of substantially constant envelope amplitude and suitable for radio-frequency amplification to a level for broadcasting;
- c) means for envelope-modulating and outputting the amplified radio-frequency modulated signal so as to have a required non-constant envelope;

wherein

the generating means b) comprises i) a frequency-offset phase locked loop including a frequency-controllable oscillator which produces as its output said modulated radio frequency signal of substantially constant envelope amplitude and ii) a phase comparator, the output of the phase comparator being a signal representing the phase difference between a constant-envelope-amplitude signal derived from the output of means c) and a constant-envelope signal derived from the baseband signal.

2. Apparatus according to claim 1, and including means for feeding back the amplified radio-frequency modulated signal (FT) to a first mixer where it is mixed with a signal of a first reference frequency (F2), the frequency being chosen such that the output of the controlled oscillator is at the required radio frequency (F1).
3. Apparatus according to claim 2 and including and a second mixer for mixing the baseband signal with a signal of a second reference frequency lower than the first frequency.
4. Apparatus according to claim 1, 2 or 3 wherein the input is for a baseband signal in I and Q quadrature format.
5. Apparatus according to claim 4, wherein the sec-

ond mixer is operative to mix the I and Q quadrature components of the baseband signal with respective ones of two signals which are at the second reference frequency and are phase shifted 90 degrees relative to one another.

6. Apparatus according to claim 5, wherein a pair of amplitude limiters are provided to render the two mixed signals of substantially constant amplitude.
7. Apparatus according to any one of the preceding claims wherein the envelope modulating means is operative to derive a control signal to control the envelope of the radio-frequency signal in accordance between the difference between that envelope and the envelope of a signal derived from the baseband signal.
8. Apparatus according to claims 2 and 7, wherein said derived signal is the signal resulting from mixing the baseband signal with the second reference signal.

Fig.1.

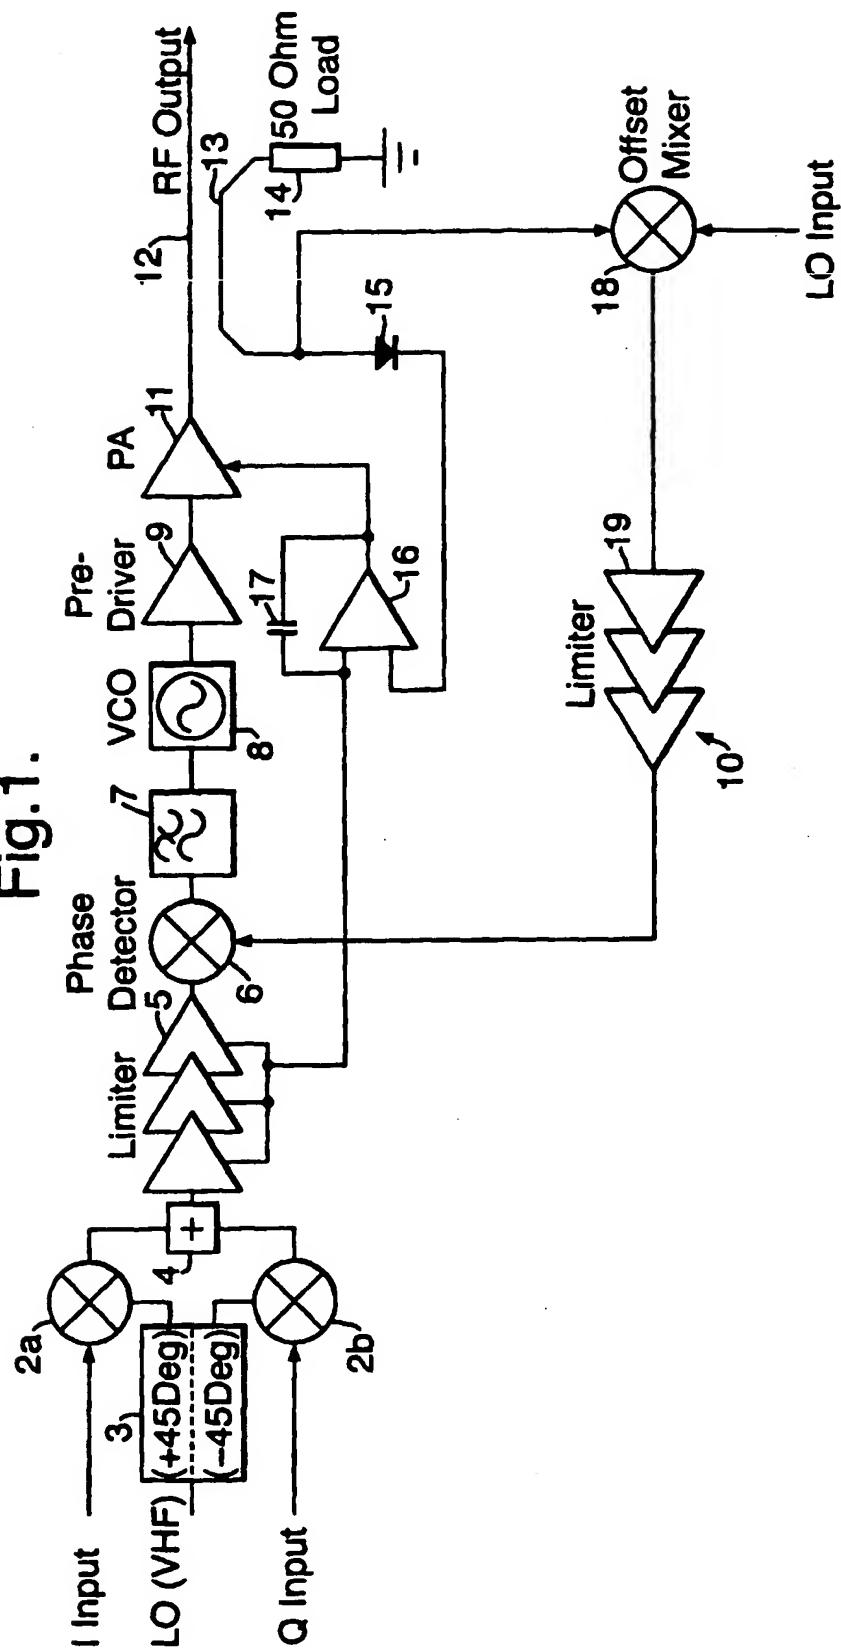


Fig. 2a.


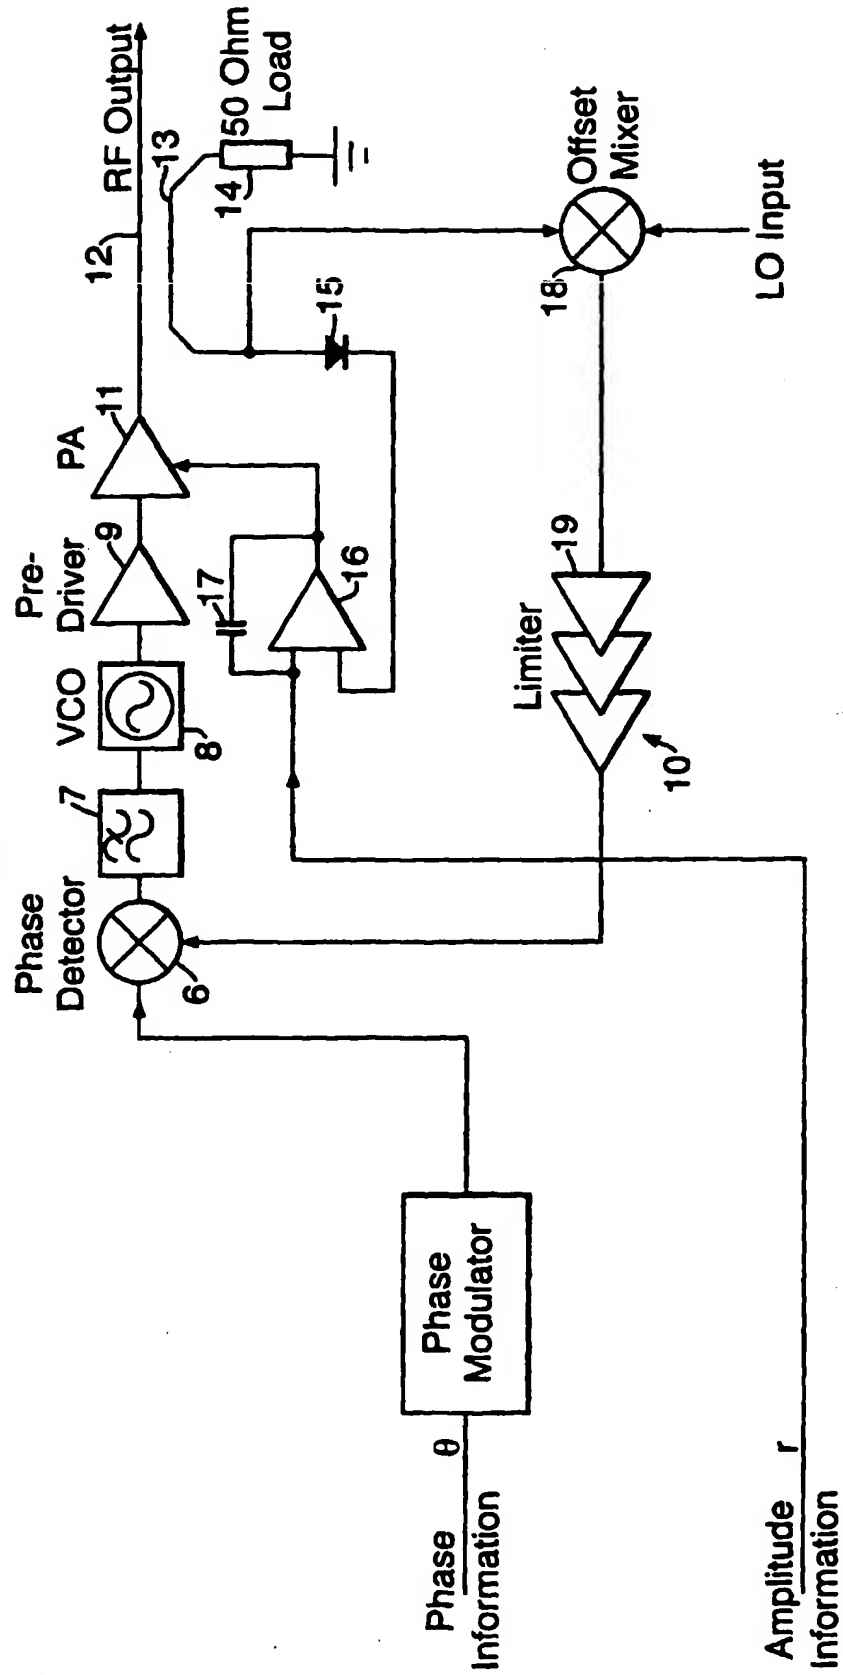


Fig.2b.



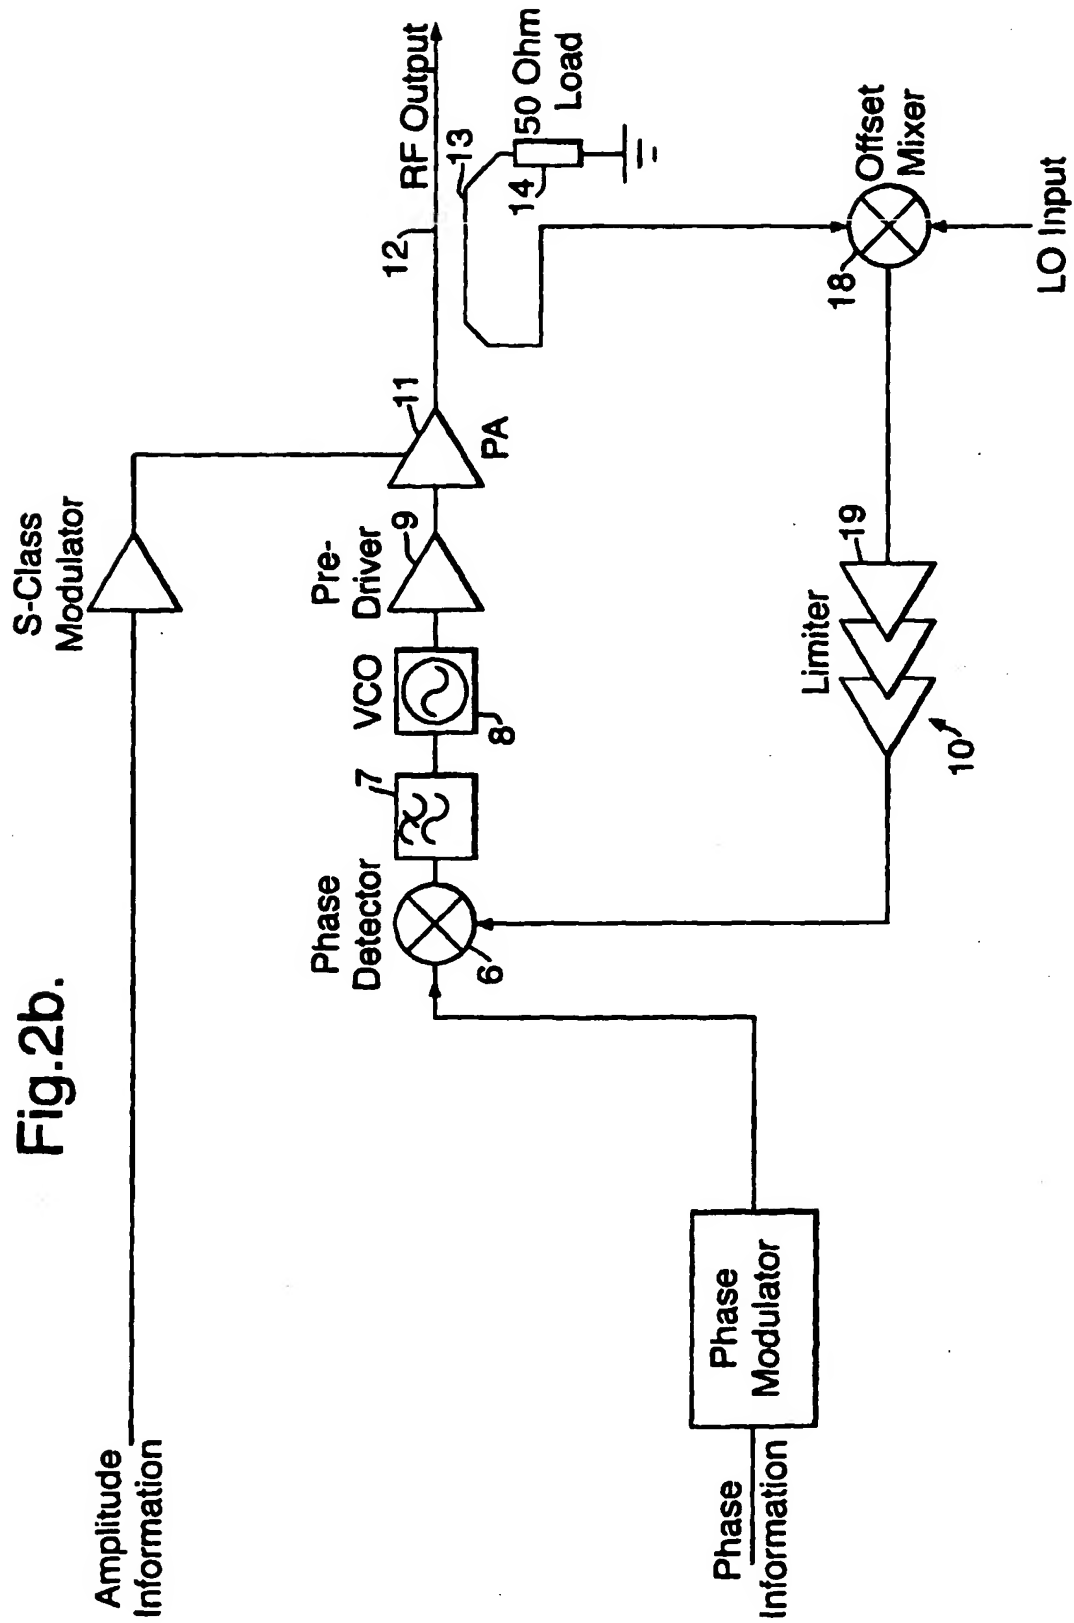

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 3827

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 430 416 A (G. BLACK) 4 July 1995 (1995-07-04) * column 4, line 23 - column 5, line 28; figure 4 *	1	H03C5/00
A	US 5 420 536 A (M. FAULKNER) 30 May 1995 (1995-05-30) * column 9, line 11 - line 29; figures 1,7 *	1	
A	WO 99 05869 A (HARRIS CORP) 4 February 1999 (1999-02-04) * page 6, line 23 - page 7, line 30; figures 1-3 *	1	
A	US 5 369 789 A (H. KOSUGI) 29 November 1994 (1994-11-29) * column 2, line 42 - column 4, line 61; figure 1 *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7) H03C H04L
Place of search THE HAGUE		Date of completion of the search 20 September 2000	Examiner Butler, N
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

Form 1500 (04/98) (P04/00)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 3827

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-09-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5430416 A	04-07-1995	AU 672549 B	03-10-1996
		AU 1674995 A	11-09-1995
		CN 1121752 A,B	01-05-1996
		DE 4480702 C	20-04-2000
		DE 4480702 T	21-03-1996
		FR 2716589 A	25-08-1995
		GB 2291754 A,B	31-01-1996
		JP 8509589 T	08-10-1996
		RU 2121755 C	10-11-1998
		SE 9503687 A	21-12-1995
		WO 9523453 A	31-08-1995
		ZA 9500442 A	27-09-1995
US 5420536 A	30-05-1995	AU 5781794 A	22-09-1994
WO 9905869 A	04-02-1999	AU 8414298 A	16-02-1999
		EP 0998823 A	10-05-2000
US 5369789 A	29-11-1994	JP 2800500 B	21-09-1998
		JP 5095295 A	16-04-1993
		DE 69209206 D	25-04-1996
		DE 69209206 T	02-10-1996
		EP 0535669 A	07-04-1993

EPO FORM P4459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.